


3 POLE LED DRIVER & BALLAST PROTECTION MODULE

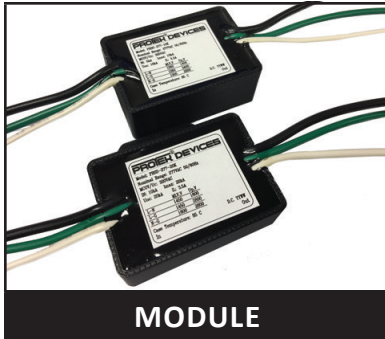

MODULE

DESCRIPTION

The PBSS Series connection modules are designed to be used to protect LED drivers and ballast. These devices provide an additional level of protection against transients induced in the power line by lightning and inductive switching, in industrial and commercial applications.

FEATURES

- Meets ANSI C136.2 / IEEE C62.41.2 Location Category C High Exposure Requirement
- IP66 Waterproof and Dustproof
- Meets UL1449 Type 4 Component Assembly Requirement
- Meets IEC 61643-11 Class II / EN61643-11 Type 2 Standard Requirement
- Meets CE Class I & II Installation Requirement
- Compact Form Factor With Mounting Tabs
- Thermally Protected
- Protects Line to Neutral, Line to Ground and Neutral to Ground in Accordance with IEEE/ANSI C62.41.2 Guidelines
- Surge Current 20,000 Amps @ 8/20 μ s Waveform
- High Temperature Flameproof Plastic Enclosure
- Maximum Temperature Rating of 85°C
- 10kA and 20kA Max Ratings (1 Shot)


MECHANICAL CHARACTERISTICS

- High Temperature Flameproof Plastic Enclosure
- Maximum Temperature Raing of 85°C (Surface)
- Approximate Weight: 100 grams
- Flammability Rating UL 94V-0
- Marking: Logo, Part Number, Device Information

APPLICATIONS

- LED Drivers
- Universal Voltage Ballast

APPLICATION

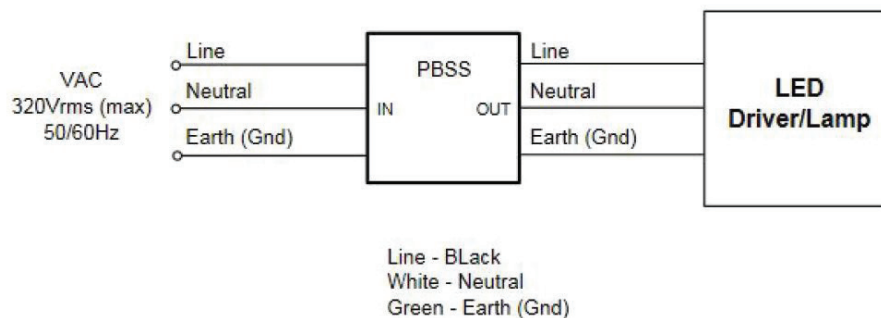

TYPICAL DEVICE CHARACTERISTICS
MAXIMUM RATINGS @ 25°C Unless Otherwise Specified

PARAMETER	SYMBOL	VALUE	UNITS
Peak Pulse Current (tp = 8/20μs)	I_{PP}	20,000	Amps
Operating Temperature	T_L	-40 to 85	°C
Storage Temperature	T_{STG}	-40 to 85	°C

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified

PART NUMBER	OPERATING VOLTAGE (VAC) 50/60Hz	LINE CURRENT I_L AMPS	MCOV (VAC)	MAXIMUM DISCHARGE CURRENT I_{MAX} kA	NOMINAL DISCHARGE CURRENT I_{MAX} kA	MLV, V		UP (V)
						L-N	L-E(GND)	
PBSS-277-10KA	277	3.5	320	10	5	L-N	1260	1400
						L-E(GND)	1260	2400
						N-E(GND)	1300	2200
PBSS-277-20KA	277	3.5	320	20	10	L-N	1450	1600
						L-E(GND)	1450	2800
						N-E(GND)	1600	2600

TYPICAL DEVICE CHARACTERISTICS

FIGURE 1
PULSE WAVE FORM



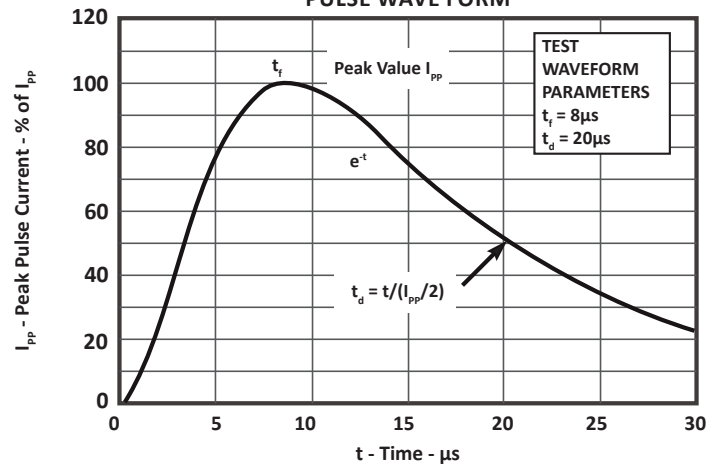


FIGURE 2
POWER DERATING CURVE

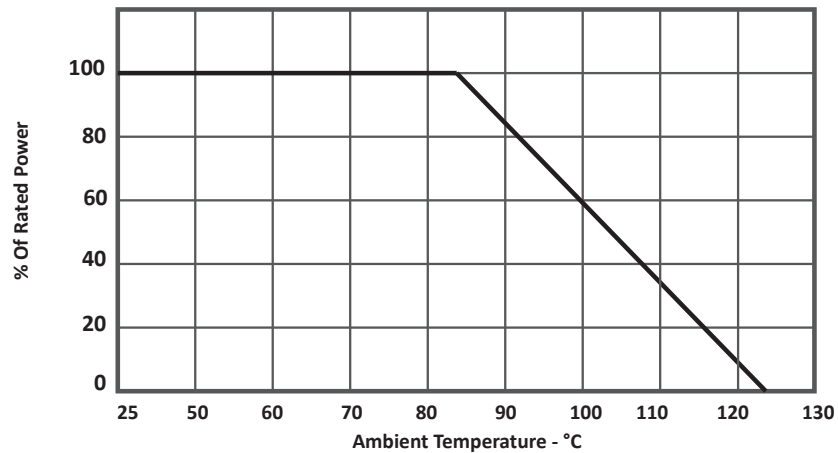

PACKAGE INFORMATION

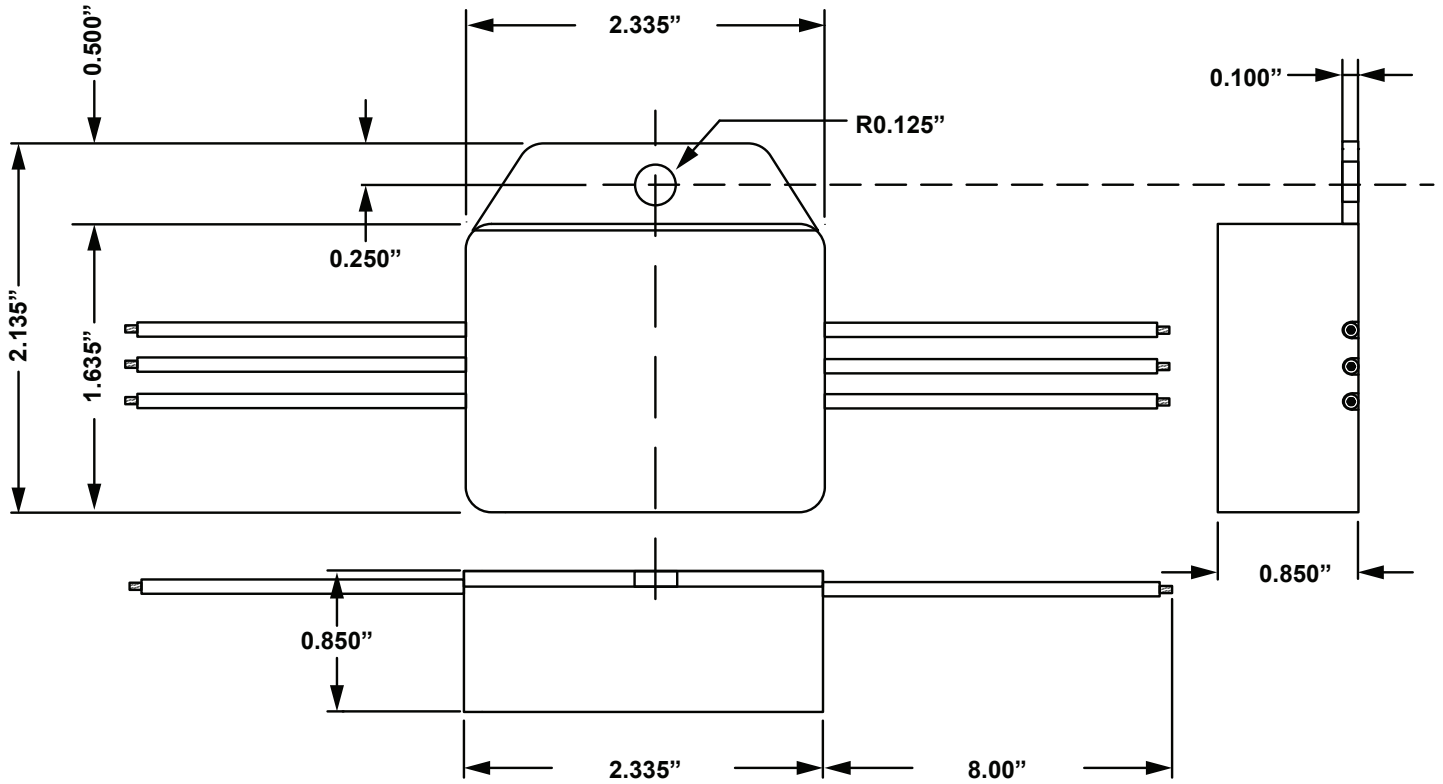

COMPANY INFORMATION

COMPANY PROFILE

In business more than 25 years, ProTek Devices™ is a privately held semiconductor company. The company offers a product line of overvoltage protection and overcurrent protection components. These include transient voltage suppressor array (TVS arrays) avalanche breakdown diode, steering diode TVS array and electronics SMD chip fuses. These components deliver circuit protection in electronic systems from numerous overvoltage and overcurrent events. They include lightning; electrostatic discharge (ESD); nuclear electromagnetic pulses (NEMP); inductive switching; and electromagnetic interference (EMI) / radio frequency interference (RFI). ProTek Devices also offers LED wafer die for ESD protection and related high frequency products. ProTek Devices is ISO 9001:2015 certified.

CONTACT US

Corporate Headquarters

2929 South Fair Lane
Tempe, Arizona 85282
USA

By Telephone

General: 602-431-8101
Sales: & Marketing: 602-414-5109
Customer Service: 602-414-5114
Product Technical Support: 602-414-5107

By Fax

General: 602-431-2288

By E-mail:

Asia Sales: asiasales@protekdevices.com
Europe Sales: europesales@protekdevices.com
U.S. Sales: ussales@protekdevices.com
Distributor Sales: distysales@protekdevices.com
Customer Service: service@protekdevices.com
Technical Support: support@protekdevices.com

ProTek Devices (Asia Pacific) Pte. Ltd.

8 Ubi Road 2, #06-19
Zervex
Singapore - 408538
Tel: +65-67488312
Fax: +65-67488313

Web

www.protekdevices.com

COPYRIGHT © ProTek Devices 2017 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice.

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.